


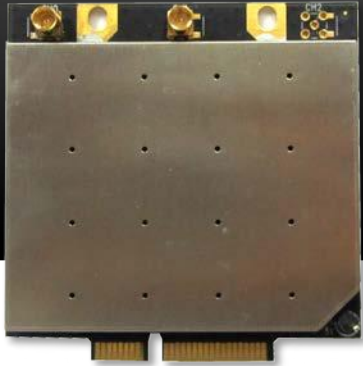

802.11ac 5GHz miniPCle Radio

Model: WLE600V5-23

FEATURES

- Qualcomm-Atheros QCA9882
- Maximum 23dBm output power (per chain), 26dBm (aggregate)
- IEEE 802.11ac complaint & backward compatible with 802.11a/n
- 2X2 MIMO Technology & up to 867Mbps
- MiniPCI Express 1.1 interface
- Supports Spatial Multiplexing, Cyclic-Delay Diversity (CDD), low-density parity check (LDPC), Maximal Ratio Combining (MRC), Space Time Block Code (STBC)
- Supports IEEE 802.11d, e, h, I, k, RO, v time stamp, and w standards
- Supports Dynamic Frequency Selection (DFS)
- Cards are individually calibrated for Quality Assurance

APPLICATIONS (combined with WPJ344)

- Indoor AP
- Outdoor AP
- 802.11ac CPE
- 802.11ac Point to Point




*Supported by either CompexWRT with Atheros Reference Wireless Driver OR OpenWRT with ath10k Wireless Driver on WPJ344.

TECHNICAL SPECIFICATIONS

SYSTEM INFORMATION	
Chipset	QCA9882
Host Interface	PCI-Express 1.1 Standard
Operating Voltage	3.3 VDC, 5V (compulsory and external) ¹
Power Consumption	7W
Antenna Connector	2 x MMCX Antenna Connector
Frequency Range	5.150 ~ 5.875 GHz
Modulation Techniques	OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
RoHS Compliance	Yes
Temperature Range	Operating: -20°C to 70°C; Storage: -40°C to 90°C
Humidity	Operating: 5% to 95% (non-condensing) Storage: Max. 90% (non-condensing)
Dimensions (mm)	50.95 x 50 x 3.2 (H x W x D)

¹Customers have to connect a 5V power supply to the pin on WLE600N5-23.

DIMENSION DRAWING

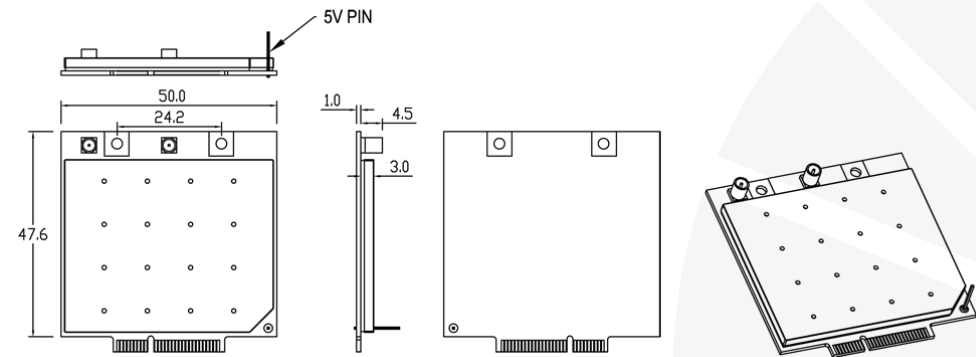

Compex Systems Pte Ltd

135 Joo Seng Road #08-01
Singapore 368363
Tel: +65 6286 2086
Fax: +65 6280 9947
Email: sales@compex.com.sg

Compex (Suzhou) Co Ltd

No.12 ChuangTou Industrial Square
LouFeng North, Suzhou Industrial Park
Suzhou, Jiangsu Province, China 215122
Tel: +86 512 62950050
Fax: +86 512 62950026

**TX SPECIFICATIONS**

	DataRate	TX Power (per chain)	TX Power (2 chains)	Tolerance		DataRate	TX Power (per chain)	TX Power (2 chains)	Tolerance
802.11a	6Mbps	23dBm	26dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	23dBm	26dBm	±2dB
	9Mbps	23dBm	26dBm	±2dB		MCS 1	23dBm	26dBm	±2dB
	12Mbps	23dBm	26dBm	±2dB		MCS 2	23dBm	26dBm	±2dB
	18Mbps	23dBm	26dBm	±2dB		MCS 3	23dBm	26dBm	±2dB
	24Mbps	23dBm	26dBm	±2dB		MCS 4	23dBm	26dBm	±2dB
	36Mbps	23dBm	26dBm	±2dB		MCS 5	23dBm	26dBm	±2dB
	48Mbps	21dBm	24dBm	±2dB		MCS 6	21dBm	24dBm	±2dB
	54Mbps	19dBm	22dBm	±2dB		MCS 7	19dBm	22dBm	±2dB
5GHz 11n/11ac HT40	MCS 0	23dBm	26dBm	±2dB	5GHz 11ac HT80	MCS 8		20dBm	
	MCS 1	23dBm	26dBm	±2dB		MCS 0	23dBm	26dBm	±2dB
	MCS 2	23dBm	26dBm	±2dB		MCS 1	23dBm	26dBm	±2dB
	MCS 3	23dBm	26dBm	±2dB		MCS 2	23dBm	26dBm	±2dB
	MCS 4	23dBm	26dBm	±2dB		MCS 3	23dBm	26dBm	±2dB
	MCS 5	22dBm	25dBm	±2dB		MCS 4	23dBm	26dBm	±2dB
	MCS 6	21dBm	24dBm	±2dB		MCS 5	22dBm	25dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB		MCS 6	21dBm	24dBm	±2dB
	MCS 8	17dBm	20dBm	±2dB		MCS 7	19dBm	22dBm	±2dB
	MCS 9	15dBm	18dBm	±2dB		MCS 8	17dBm	20dBm	±2dB
						MCS 9	15dBm	18dBm	±2dB

RX SPECIFICATIONS

	DataRate	Sensitivity	Tolerance		DataRate	Sensitivity	Tolerance
802.11a	6Mbps	-94dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	-94dBm	±2dB
	9Mbps	-94dBm	±2dB		MCS 1	-94dBm	±2dB
	12Mbps	-94dBm	±2dB		MCS 2	-92dBm	±2dB
	18Mbps	-92dBm	±2dB		MCS 3	-88dBm	±2dB
	24Mbps	-89dBm	±2dB		MCS 4	-84dBm	±2dB
	36Mbps	-86dBm	±2dB		MCS 5	-81dBm	±2dB
	48Mbps	-82dBm	±2dB		MCS 6	-78dBm	±2dB
	54Mbps	-80dBm	±2dB		MCS 7	-77dBm	±2dB
5GHz 11n/11ac HT40	MCS 0	-93dBm	±2dB	5GHz 11ac HT80	MCS 8	-74dBm	±2dB
	MCS 1	-91dBm	±2dB		MCS 0	-89dBm	±2dB
	MCS 2	-90dBm	±2dB		MCS 1	-88dBm	±2dB
	MCS 3	-85dBm	±2dB		MCS 2	-85dBm	±2dB
	MCS 4	-82dBm	±2dB		MCS 3	-81dBm	±2dB
	MCS 5	-78dBm	±2dB		MCS 4	-79dBm	±2dB
	MCS 6	-77dBm	±2dB		MCS 5	-75dBm	±2dB
	MCS 7	-75dBm	±2dB		MCS 6	-74dBm	±2dB
	MCS 8	-73dBm	±2dB		MCS 7	-72dBm	±2dB
	MCS 9	-71dBm	±2dB		MCS 8	-70dBm	±2dB
					MCS 9	-68dBm	±2dB