

# OWL OH35 Handheld Thermal Monocular Camera





HikMicro OWL OH35 handheld thermal monocular camera is equipped with a 384 × 288 infrared detector and a 1024 × 768 OLED display. It supports functions of observation, highest temperature target tracking, distance measurement, Wi-Fi hot spot, and so on. The high-sensitivity built-in thermal detector provides you with clear view even in total darkness. The monocular is mainly applied to scenarios such as patrolling, I searching and rescuing, hiking, travel, and hunting, etc.

#### **Key Features**

- High sensitivity thermal module with 384 × 288 resolution
- NETD <35 mK (@25 °C, F#=1.0)
- Leading thermal image processing technology: Adaptive AGC, DDE, 3D DNR
- 1024 × 768 resolution 0.39-inch OLED display
- Built-in rechargeable Li-ion battery
- Up to 7 hours continuous operation



<b>^</b>		
Spe	CITICA	ation
960		


Thermal Module				
Image Sensor	VOx Uncooled Focal Plane Arrays			
Resolution	384 × 288			
Frame Frequency	50 Hz			
Pixel Interval	17 μm			
Response Waveband	8 μm to 14 μm			
NETD	Less than 35 mK (@25°C),F#=1.0			
Focal Length	35 mm			
Field of View	$10.66^{\circ} \times 8^{\circ} (H \times V)$			
Aperture	F1.0			
Magnification	2.3 to 18.4			
Image Display				
Monitor	0.39 inch, OLED, 1024 × 768			
Palettes	Black Hot, White Hot, Red Hot, Fusion			
FFC (Flat Field Correction) Mode	to, Manual, External Correction			
Digital Zoom	1x, 2x, 4x, 8x			
Smart Function				
Hot Track	Yes			
Detection Range	1235 m			
System				
Storage	Built-in memory module (16 GB)			
Record Video	Yes			
Capture Snapshot	Yes			
Wi-Fi	Yes			
Standby Mode	Yes			
Power Supply				
Battery Type	Rechargeable Lithium Battery			
Battery Operating Time	7 hours continuous running with Wi-Fi hot spot function off (@25 $^\circ$ C)			
battery operating time	5.5 hours continuous running with Wi-Fi hot spot function on (@25 $^\circ$ C)			
Battery Capacity Display	Yes			
General				
Mounting	UNC 1/4' - 20			
Hardware Interface	Interface Type-C USB			
Power	5 VDC/2 A			
Power Consumption	1.5 W			
Work Temperature/Humidity	From -30°C to 55°C (-22°F to 131°F); Humidity: 90% or Less			
Protection Level	IP67			
Drop Test Height	2 m (6.56 feet)			
Dimension	201.6 mm × 73.7 mm × 66 mm (7.94" × 2.90" × 2.60")			
Weight	500 g (1.10 lb)			




# Available Model

HM-TS03-35XF/W-OH35

#### Dimension



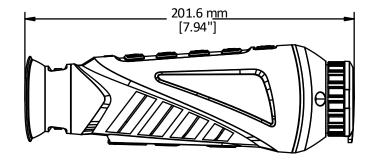

### Accessory



Quick Start Guide (×1)

Non-dust Cloth (×1)







USB Cable (x1)

Protective Bag (×1)

Wrist Strap (x1)



Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang

© Hangzhou Microimage Software Co., Ltd. 2020 | Data subject to change without notice!