



Parabolic antenna JRMB - 900 -10/11

Antenna JRMB – 900 – 10/11 is designed for microwave links at the frequency bands 10 and 11 GHz. It has deep reflector dish and massive bracket which allows precise adjustment in both directions. Whole antenna system with bracket JDMW-900 has extreme wind stability.

Electrical parameters:

Frequency range	10.1 – 11.7 GHz
Gain – Low band	37.0 ± 0.5 dBi
Gain – High band	37.5 ± 0.5 dBi
Side lobe level	≤ 15 dB
Front to back ratio	≥ 47 dB
Beamwidth_{-3 dB}	2.3°
Polarization	Vertical / Horizontal
Return loss (VSWR)	≥ 18 dB (≤ 1,3)



Mechanical parameters:

Parabola	Aluminium alloy
Size	Ø 900 mm
Depth	331 mm
Cover	UV steady plastic ABS
Input / output	Circle waveguide 19 mm
Installation for mast	Ø 40 - 120 mm
Operating wind load	140 km/h
Survival wind load	210 km/h
Weight of antenna	7.6 kg (16.8 lbs.)
of bracket	4.3 kg (9.48 lbs.)
Shipping dimensions	1000 mm x 1000 mm x 490 mm

The antenna is supplied together with a bracket that allows easy mounting on a mast. Bracket can be installed separately on the mast. Subsequently, you can simply hang up the antenna with microwave unit into it. We recommend mounting on the mast with minimal Ø 70 mm in the areas with the occurrence of the adverse weather conditions. Bracket allows fine setting elevation (of gradient) and azimuth ± 20°. It is possible to mount to right and left side.


Parabolic antenna JRMB - 900 - 10/11

Measurement of radiation pattern:

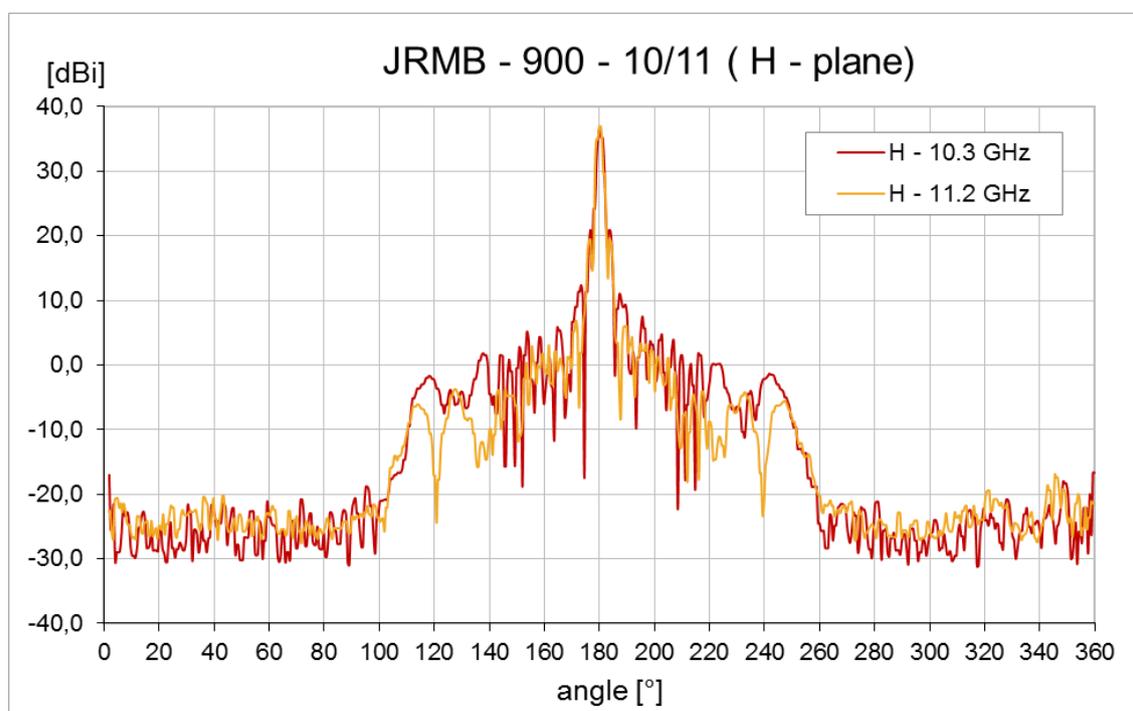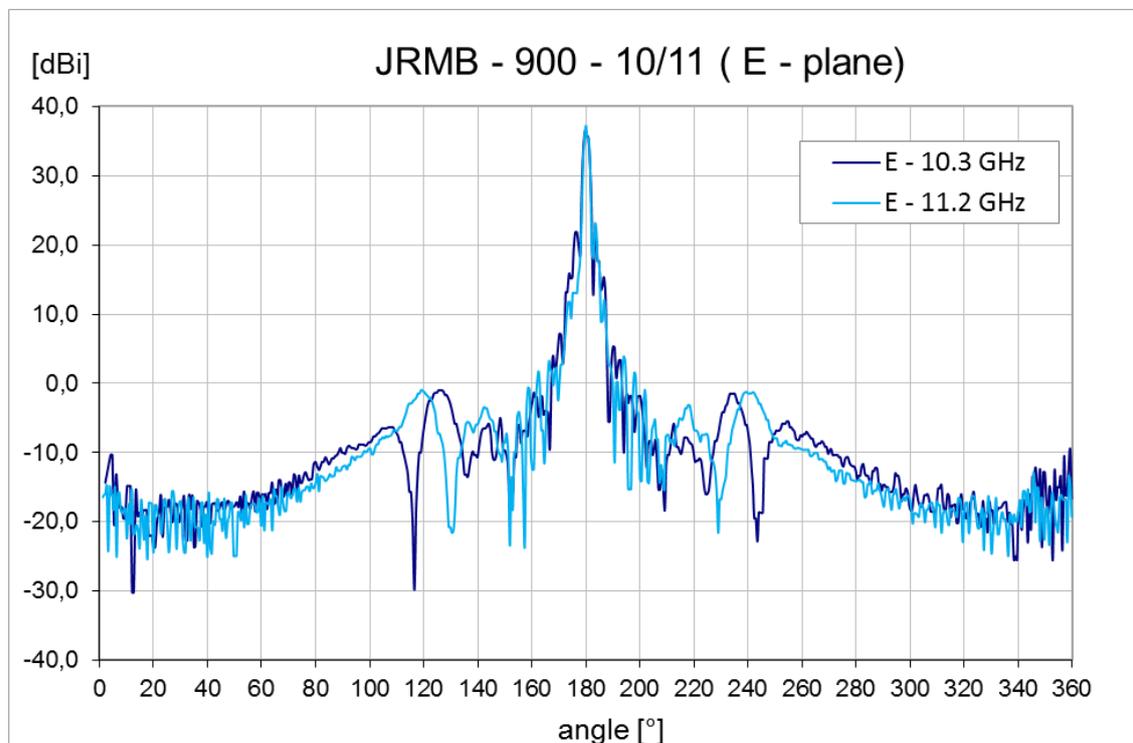


Parabolic antenna JRMB - 900 -10/11

Outline:

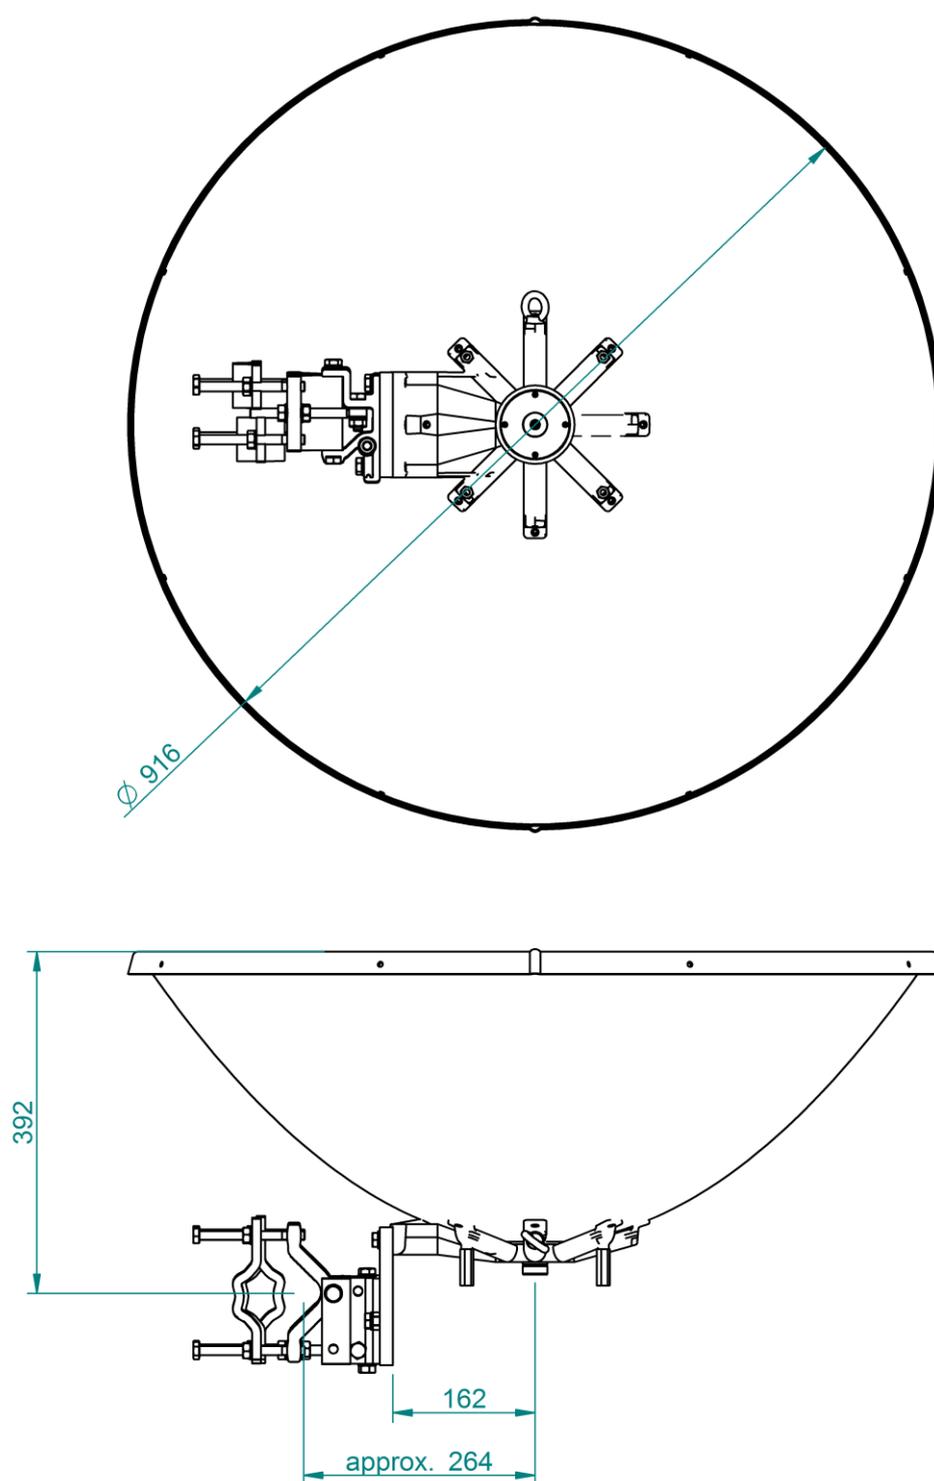

Parabolic antenna JRMB - 900 -10/11

Wind loading:

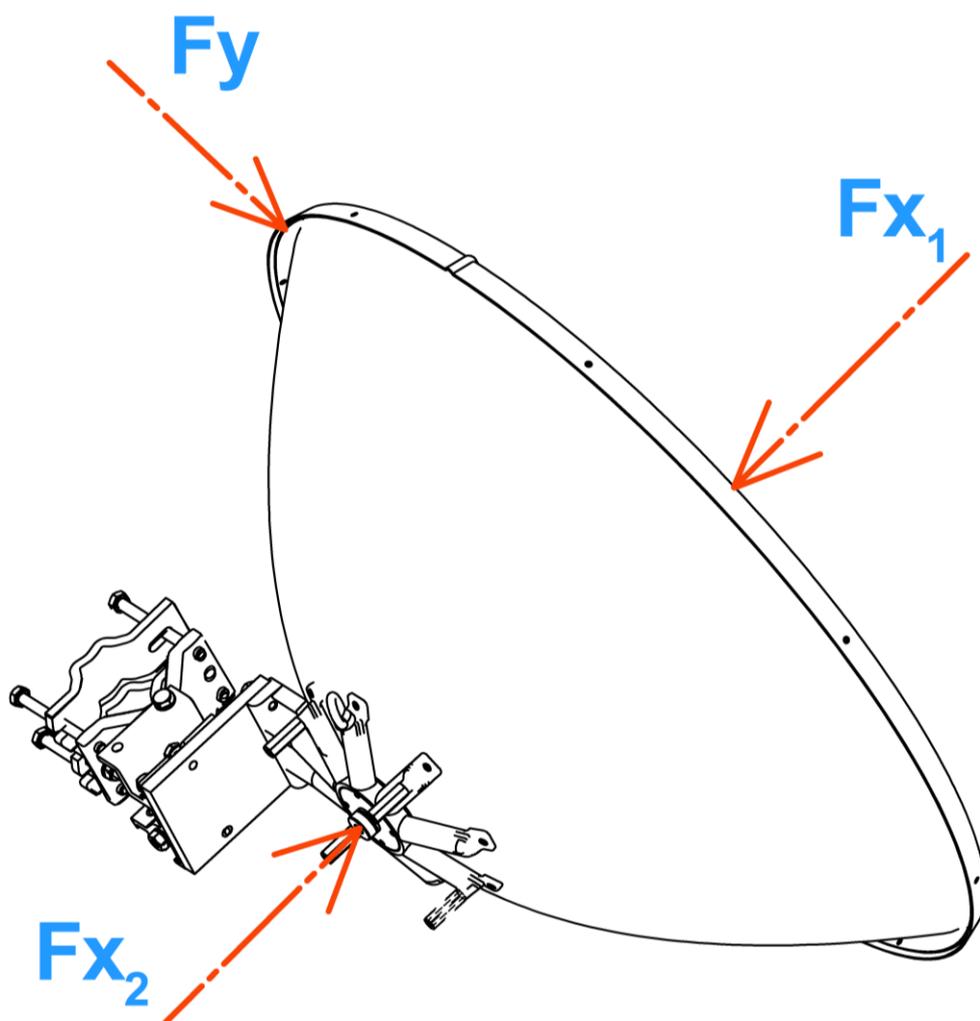

Wind Loading at 200 km/h (125 mph)		
Direction	Force [N]	Force [lbf]
Fx1	1443	325
Fx2	1324	298
Fy	91	20,5