

High Quality Antenna Pigtails

SEMI-FLEXIBLE COAXIAL PIGTAILS



MECHANICAL

Inner Conductor	Silver plated copper, diameter 0.94±0.01 mm
Dielectric	PTFE, diameter 2.98±0.05 mm
Outer Conductor	Tin plated copper wire (16*6*0.12), diameter 3.55±0.05 mm
Jacket	Black, diameter 4.10±0.05 mm
Bending Radius	Single: 8mm Multiple: 40 mm / 20 times
Operating Temp	-65°C to 150°C


ELECTRICAL

Impedance	50±2 Ohm
Time Delay	4.7 ns/m
Connectors	RP-SMA Male

ENVIRONMENTAL

RoHS Compliant

PRODUCT DIMENSIONS

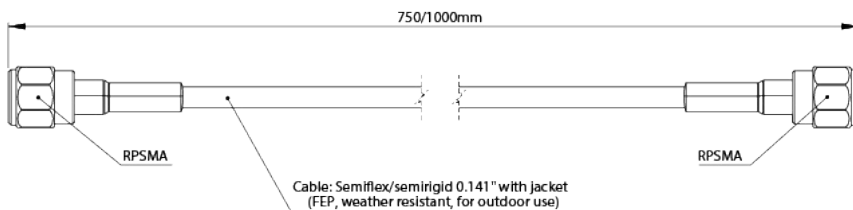

RP-SMA-FLEX Length: 750 mm / 29.5 inch
Packaging: plastic bag contains 4 units

RP-SMA-FLEX-1M Length: 1000 mm / 39.3 inch
Packaging: plastic bag contains 2 units