



E7  
E7



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

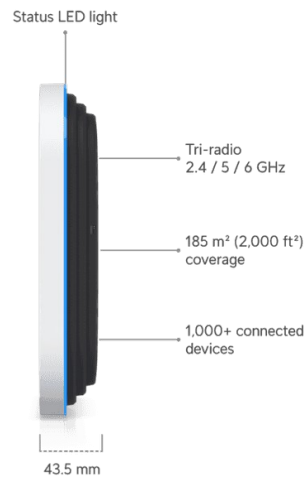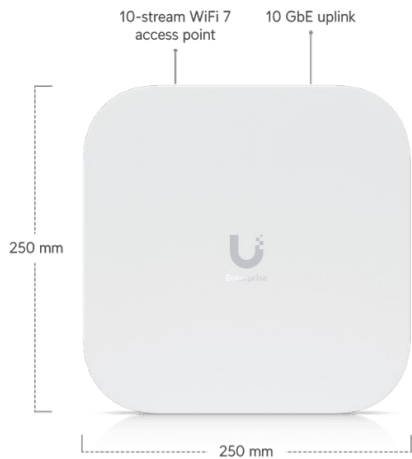

### Overview

Dimensions	250 x 250 x 43.5 mm (9.8 x 9.8 x 1.7")
WiFi Standard	WiFi 7 ●
Spatial Streams	10
Coverage Area	185 m <sup>2</sup> (2,000 ft <sup>2</sup> )
Max. Client Count	1000+
Uplink	10 GbE 1 GbE



Mounting

Ceiling, Wall, VESA  
(Pro Mount Included)

Power Method

PoE++

^ Performance

MIMO

6 GHz	4 x 4 (DL/UL MU-MIMO)
5 GHz	4 x 4 (DL/UL MU-MIMO)
2.4 GHz	2 x 2 (DL/UL MU-MIMO)

Max. Data Rate


6 GHz	11.5 Gbps (BW320)
5 GHz	8.6 Gbps (BW240)
2.4 GHz	688 Mbps (BW40)

Antenna Gain

6 GHz	6 dBi
5 GHz	6 dBi
2.4 GHz	5 dBi

Max. TX Power

6 GHz	24 dBm / 30 dBm ●
5 GHz	30 dBm
2.4 GHz	23 dBm

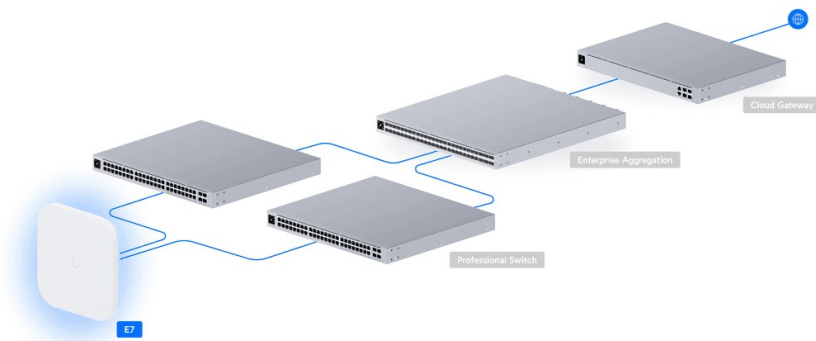

Max. BSSIDs

8 per Radio

### Supported Data Rates

802.11be (WiFi 7)	7.3 Mbps to 11.4 Gbps (MCS0 - MCS13 NSS1/2/3/4, EHT 20/40/80/160/240/320)
802.11ax (WiFi 6)	7.3 Mbps to 4.8 Gbps (MCS0 - MCS11 NSS1/2/3/4, HE 20/40/80/160)
802.11ac (WiFi 5)	6.5 Mbps to 3.4 Gbps (MCS0 - MCS9 NSS1/2/3/4, VHT 20/40/80/160)
802.11n	6.5 Mbps to 600 Mbps (MCS0 - MCS31, HT 20/40)

---

### ^ Features

Wireless Meshing	✓
Band Steering	✓
802.11v BSS Transition Management	✓
802.11r Fast Roaming	✓
802.11k Radio Resource Management (RRM)	✓
Zero-Wait DFS	✓
Advanced Radio Management	✓
Real-Time Spectral Analysis ●	✓
Passpoint (Hotspot 2.0)	✓

## Captive Hotspot Portal

Custom Branding Landing Page	✓
Voucher Authentication	✓
Payment-Based Authentication	✓
External Portal Server Support	✓
Password Authentication	✓
Guest Network Isolation	✓
Private Pre-Shared Key (PPSK)	✓
WiFi Speed Limiting	✓
Client Device Isolation	✓
WiFi Schedules	✓
RADIUS over TLS (RadSec)	✓
Dynamic RADIUS-assigned VLAN	✓

---

## ^ Hardware

Max. Power Consumption	43W
Supported Voltage Range	42.5–57V DC
Networking Interface	(1) 10 GbE RJ45 port (1) 1 GbE RJ45 port
Weight	1.8 kg (4 lb)
Management	Ethernet

Enclosure Material	UV-stabilized polycarbonate, aluminum alloy
Mount Material	Stainless steel (SUS304), galvanized steel (SGCC)
LEDs	
└ System	R/G/B
Channel Bandwidth	HT 20/40, VHT 20/40/80/160, HE 20/40/80/160, EHT 20/40/80/160/240/320 (MHz)
Operating Frequency	<p>US/CA:  2400 - 2472 MHz  U-NII-1: 5150 - 5250 MHz  U-NII-2A: 5250 - 5350 MHz  U-NII-2C: 5470 - 5725 MHz  U-NII-3: 5725 - 5850 MHz  U-NII-5 to U-NII-8: 5925 - 7125 MHz</p> <p>Worldwide:  2400 - 2483.5 MHz  5150 - 5850 MHz  5925 - 7125 MHz</p>
Ambient Operating Temperature	-30 to 50° C (-22 to 122° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 06372-24-08356

---

^ **Software**

## Application Requirements

UniFi Network	Version 9.2.87 and later
Mobile App	iOS™ version 10.24.1 and later Android™ version 10.25.2 and later

### Company

[Blog](#)  
[Case Studies](#)  
[Careers](#)  
[Trust Center](#)  
[Contact Us](#)  
[Investors](#)  
[Compliance](#)

### Training

[Courses](#)  
[Calendar](#)  
[Trainers](#)  
[Become a Trainer](#)

### Buy Now

[Ubiquiti Store](#)  
[Find a Distributor](#)

### Tools

[WiFiman](#)  
[UISP](#)  
[UniFi Design Center](#)  
[UISP Design Center](#)  
[Downloads](#)

### Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.