

# SX60L 3.0

## Thermal Scope



HIKMICRO STELLAR SX60L 3.0 Thermal Scope is equipped with a  $1280 \times 1024$  @ $12 \mu\text{m}$  thermal detector, with much higher sensitivity ( $\text{NETD} < 18 \text{ mK}$ ) and the latest image processing algorithm (Image Pro 2.0), ensuring users catch the finest details no matter the weather or light conditions without interruption. With a  $2560 \times 2560$  1.03" OLED larger display, SX60L 3.0 makes it easier to spot targets quickly and accurately. The built-in lens 1000 m LRF and ballistic calculation contribute to more accurate shooting. The scope is mainly used for field and forest hunting.

## Key Feature

- $1280 \times 1024$  resolution @ $12 \mu\text{m}$  thermal detector
- High sensitivity thermal module  $\text{NETD} < 18 \text{ mK}$  (@ $25^\circ\text{C}$ ,  $F\# = 1.0$ )
- 60 mm, F1.0 lens with detection range up to 3100 m
- $2560 \times 2560$  resolution 1.03-inch OLED display
- Built-in lens laser rangefinder up to 1000 m, with ballistic calculation
- Rechargeable internal batteries and external battery, 9h continuous operation
- High shock resistance up to 1000 g/0.4 ms

# Specification

Thermal Module	
Image Sensor	VOx Uncooled Focal Plane Arrays
Max. Resolution	1280 × 1024
Frame Rate	25 Hz
Pixel Interval	12 μm
Response Waveband	8 μm to 14 μm
NETD	Less than 18 mK (@25°C, F# = 1.0)
Lens (Focal Length)	60 mm, F1.0
Focus Mode	Focus Ring
Detection Range*	3100 m
Min. Focusing Distance	6 m
Magnification	2.5× to 28.5× Support 1× step value of continuous zooming
Field of View(H×V), Degrees/m @100 m	14.6° × 11.7°/25.6 m × 20.5 m
Image Display	
Display	2560 × 2560, 1.03-inch OLED
FFC (Flat Field Correction) Mode	Auto, Manual, External Correction
Palettes	Black Hot, White Hot, Red Hot, Fusion, Red Monochrome, Green Monochrome
Exit Pupil	6 mm
Eye Relief	45 mm
Diopter (Range)	-4D to 4D
Brightness Adjustment	Yes
Tone Adjustment	Cold, Warm
Contrast Adjustment	Yes
Image Pro 2.0	Yes
HSIS (HIKMICRO Shutterless Image System)	No
Zoom Pro	No
System	
Record Video	On-board Video Recording
Capture Snapshot	Yes
Audio Recording	Yes
Recoil-activation Recording	Yes
Storage	Built-in EMMC (64 GB)
PIP	Yes
Hotspot	Yes
Hot Track	Yes
Distance Measurement	Yes
Zeroing Profiles	5
Freeze Zeroing	Yes
Max. Recoil	1000 g/0.4 ms
Standby Mode	Yes


Ballistic Calculation	Yes
Local Album	Yes
<b>Power Supply</b>	
Battery Type	Two rechargeable Lithium batteries (internal), one replaceable and rechargeable 18650 battery (external)
Battery Operating Time	9 hours continuous running (@25°C, LRF on)
Type-C Power Supply	DC 5 V/2 A, USB Type-C interface, Supports QC3.0 *Only the built-in battery will be charged via the type-C cable. Use the battery charger to charge the external battery.
<b>General</b>	
Mounting	Standard 30 mm
Dimension	452.6 mm × 94.3 mm × 78.9 mm
Weight	1000 g without external battery
Working Temperature	-30°C to 55°C (-22°F to 131°F)
Protection Level	IP67
Center Height	41 mm
<b>Laser Rangefinder</b>	
LRF Module in Lens	Yes
Wavelength	905 nm
Safety Class for Laser	Class 1
Max. Measuring Range	1000 m
Measurement Accuracy	±1 m
Min. Measuring Range	10 m

Note: The detection range of SX60L 3.0 (Latvia version) is up to 2900 m.

## • Available Model


HM-TR8C-60S2G/WL-SX60L 3.0

## • Dimension

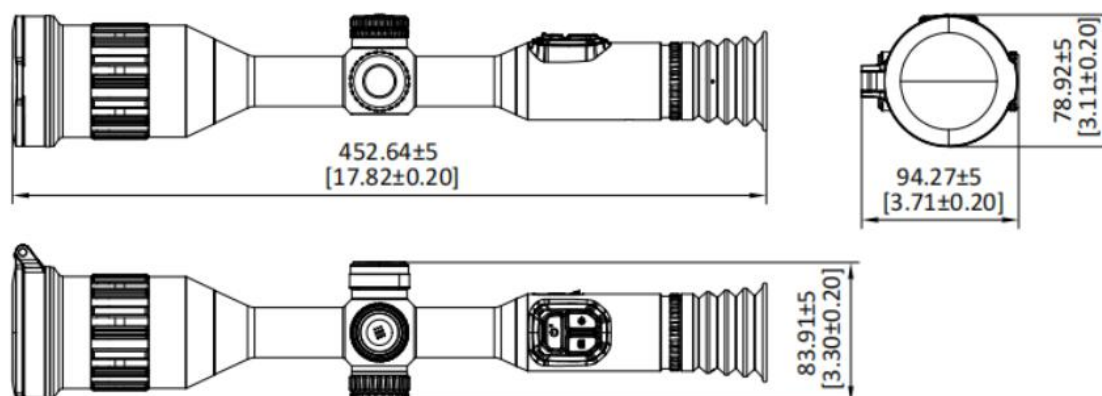

Unit: mm[inch]

## • Accessories

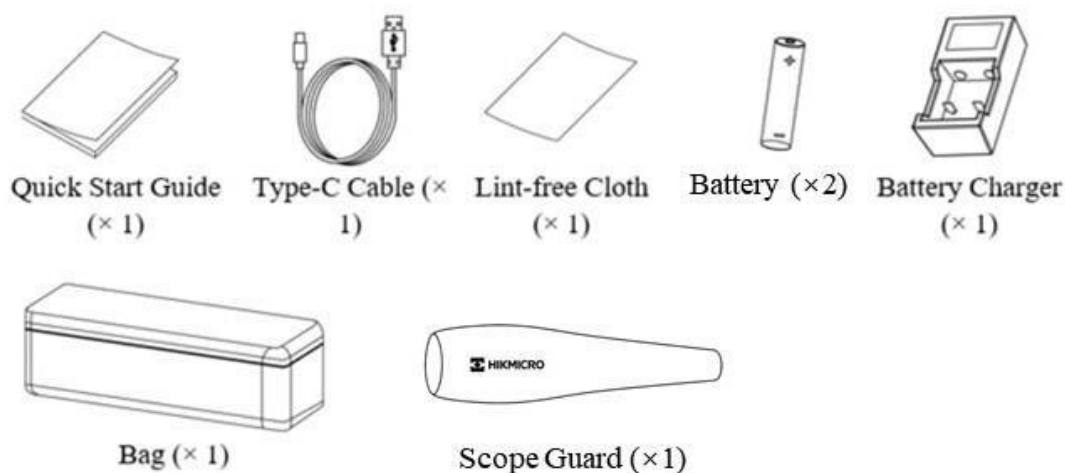

COMPLIANCE NOTICE: The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.



Hikmicro Hunting.Global HIKMICRO Outdoor [www.hikmicrotech.com](http://www.hikmicrotech.com) [hikmicro\\_hunting\\_global](https://www.instagram.com/hikmicro_hunting_global) HIKMICRO [info@hikmicrotech.com](mailto:info@hikmicrotech.com)

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang  
© Hangzhou Microimage Software Co., Ltd. All rights reserved. | Data subject to change without notice!