



Model	 TL25SE	 TL35SE
Detector Specifications		
Type	Vox	
Resolution, pixels	384×288	
Pixel size, μm	12	
NETD, mk	≤ 25	
Frame rate, Hz	50	
Optical Specifications		
Objective Lens, mm	25	35
Field of View(H×V), °	10.5×7.4	7.5×5.3
Linear Field of View(H×V), m @ 100m	18.4×13.0	13.2×9.3
Optical Magnification, ×	2.0	3.0
Digital Zoom, ×	1.0~4.0	1.0~3.0
Eye Relief, mm	50	
Exit pupil Diameter, mm	6	
Diopter Adjustment	-5 ~ +4	
Detection Range, m (Target size: 1.7m×0.5m, P(n)=99%)	1300	1800
Display Specifications		
Type	AMOLED	
Resolution,pixels	1536×1080	
Battery Power Supply		
Battery	Built-in 18650 battery-3350mAh	
Max. Operating Time (t=22°C)*, h	11	
External Power Supply	5V (Type C)	
Physical Specifications		
Wi-Fi/APP	Support (InfiRay Outdoor)	
Photo/Video Recorder	Support	
Recoil Activated Video	Support	
MIC	Support	
Bluetooth	Support	
Memory Capacity, GB	32	
IP rating	IP67	
Operating Tempeture, °C	-20 ~ +50	
Weight, g	720	
Dimension, mm	310×70×70	
Connections and Compatibilities		
Max. recoil power on rifled weapon (Eo), Joules	6000	
Compatible Mounts	25.4mm ring	



InRay Technology Co., Ltd.

Tel: 400-998-3088      Fax: +86-535-3410604  
Mail: infirayoutdoor@infiray.com      Web: www.infirayoutdoor.com  
Add: 11th Guiyang Street, YEDA, Yantai 264006, P.R.China



# TUBE Series

## TL25SE/TL35SE

TUBE SE retains most of the highly recognized features of TUBE series in a surprisingly compact body with a lighter weight of only 720g, which is easier for you to carry. Featuring a zoom ring for you to adjust magnification more easily, a Bluetooth LRF to provide precise distance measurement and a controller instead of buttons , TUBE SE is sure to bring you an all-round easier experience.





### 12um Sensor with NETD $\leq 25\text{mK}$

TUBE SE is equipped with the 12um sensor with NETD  $\leq 25\text{mK}$ , which is lighter, lower power consumption, ensures perfect detailed recognition even in the hardest weather conditions when thermal contrast is low.

NETD  $\leq 25\text{mK}$



### Easier to Carry



### Reduction in Weight & Size

TUBE SE has a body that only weighs 720g which is 28% less compared to the normal 1kg thermal riflescope.




### Easier to Use




### Zoom Ring

TUBE SE adopts a zoom ring to adjusting magnification which is consistent with the using habit of the day scope. The zoom ring is made of silicone material, which is soft and comfortable, easy to twist and anti-slip.

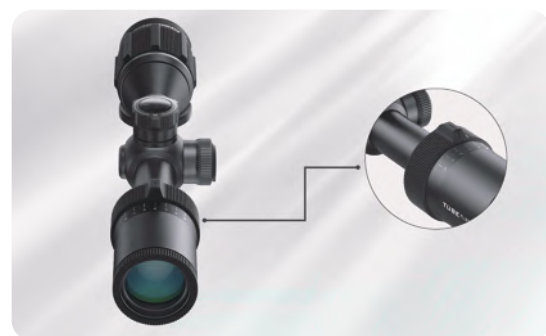

### Controller Controls Over 90% Functions

Over 90% functions can be completed by the controller of TUBE SE, the operation is simplified and to bring your more convenience during the night.

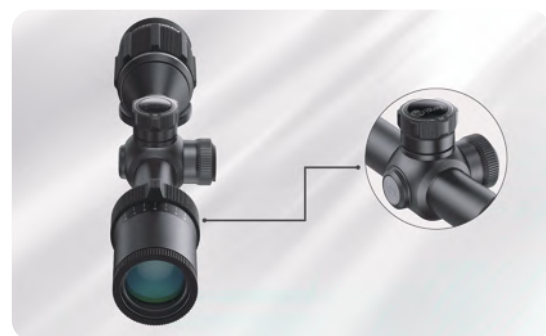

### Bluetooth LRF

TUBE SE is able to provide the distance measurement on the screen when the LRF is connected to the device through Bluetooth, earning you more chances to win in every shooting.



### Recoil Activated Video

The recoil activated video enables TUBE SE to automatically record a total of 3 minutes of video before and after shooting, recording your wonderful moments in time.



### 11h+ Working time

The working time of TUBE SE is up to 11 hours to keep your hunting going all night.



### Built-in Mic

TUBE SE is equipped with a MIC function, therefore customers can record the voice when recording.

