

SH30WB GO 5 + 6 GHz Wideband 30° Symmetrical Horn

Sector Horn Antenna For Highly Scalable Multiband Fixed Wireless Networks

SH30WB-GO is a 30° Symmetrical Horn Antenna with symmetrical beam pattern and attenuated side lobes. This Antenna offers great noise rejection in a extremely wide working band covering entire 5 GHz and 6 GHz unlicensed bands. They are perfect for high-density AP clusters and dense co-location deployments.

These antennas provide unmatched scalability, exceptional longevity, and outstanding cost-effectiveness. Built from highly corrosion-resistant materials, they are designed for long-term deployment in the most demanding environments, including coastal areas and other harsh outdoor conditions.


- Wideband performance covering entire 5 GHz and entire 6 GHz unlicensed bands
- Industry-changing TwistPort™ waveguide connector. Connect directly to waveguide ported radios or use TP Adaptor (TPA) to convert to common coaxial connectors.
- Built of high grade aluminum sheets and extruded aluminum for extreme outdoor resistance including harsh salt water and chemically challenging environments.
- Extremely lightweight and compact for low tower load and low wind loading
- Stainless steel hardware with anti-seize coating
- Industry leading ergonomics with an integrated eyelet for carabiner attachment
- Highly resistant dual layer ABS radome with additional PMMA protection layer



TECHNICAL DATA

Radio Connection	TwistPort™ Waveguide Connector
Antenna Type	Horn
Materials	Aluminum, Stainless Steel, ABS, PMMA
Enviromental	IP55
Pole Mounting Diameter	40-80 mm (1.5-3.1 inch) Recommended as close to 80 mm (3.1 inch) as possible
Temperature	-35°C to +60°C (-31°F to +140°F)
Wind Survival	160 km/h (100 mph)
Wind Load	46/28 N - Front/Side at 160 km/h (100 mph)
Effective Projected Area	381/232 cm ² - Front/Side (59.2/36 in ²)
Mechanical Adjustment	± 25° Elevation
Weight	2.0 kg / 4.4 lbs – single unit 3.0 kg / 6.6 lbs – single unit incl. package
Dimensions	Single unit retail box: 380 x 300 x 300 mm (15.0 x 11.8 x 11.8 inch)

PRODUCT DIMENSIONS

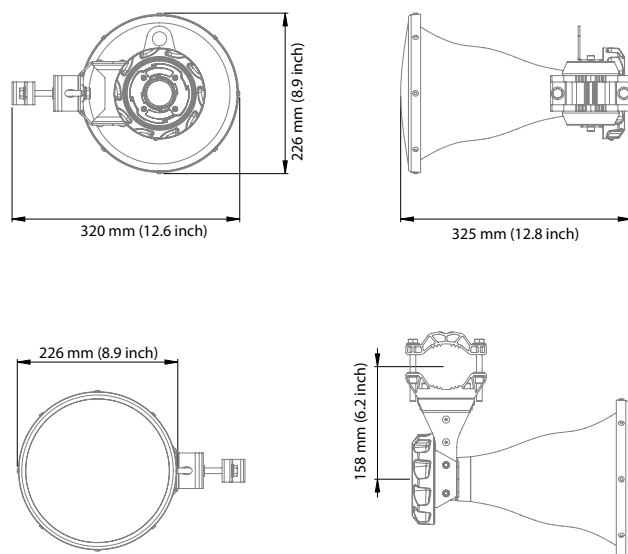

PERFORMANCE

Frequency Range	4900 - 7200 MHz
Gain	18 dBi (4900 - 6200 MHz) 20 dBi (6200 - 7200 MHz)
Azimuth Beam Width -3 dB/-6dB	H 20°, V 21° / H 29°, V 30°
Elevation Beam Width -3 dB/-6dB	H 21°, V 20° / H 30°, V 29°
Beam Efficiency*	97 %
Front-to-Back Ratio	35 dB ≤
VSWR**	≤ 1.6 (5000 - 7100 MHz) ≤ 1.9 (4900 - 7200 MHz)
Polarization**	Dual Linear H + V
Impedance	50 Ohm

* Beam efficiency defined up to first null

** Defined by connected antenna feed or radio

1/2 SH30WB-GO Rev 06-2026


RF elements® and TwistPort™ are trademarks of RF elements s.r.o., Slovakia.
All rights of respective trademark owners reserved. © RF elements 2026




This product was produced under the conditions of a certified management system that meets the requirements of the ISO 9001, ISO 14001 and ISO 45001 standard, while this system was certified by QSCert.

www.rfelements.com


ANTENNA GAIN

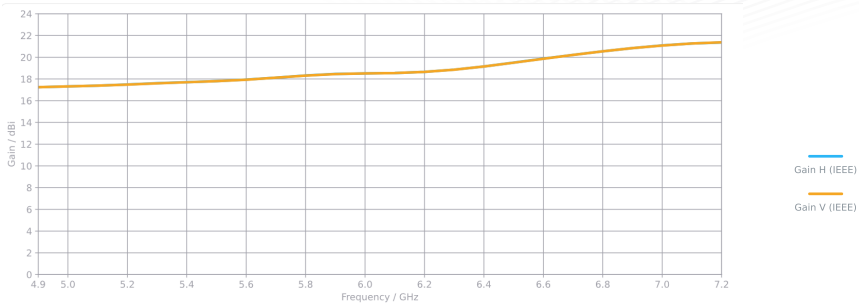

ANTENNA BEAMWIDTH

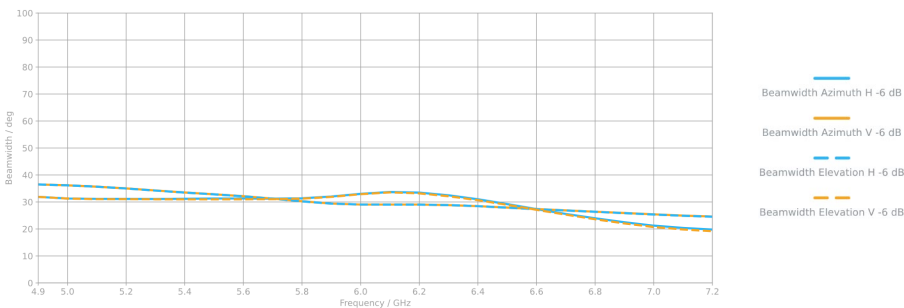

BEAM EFFICIENCY

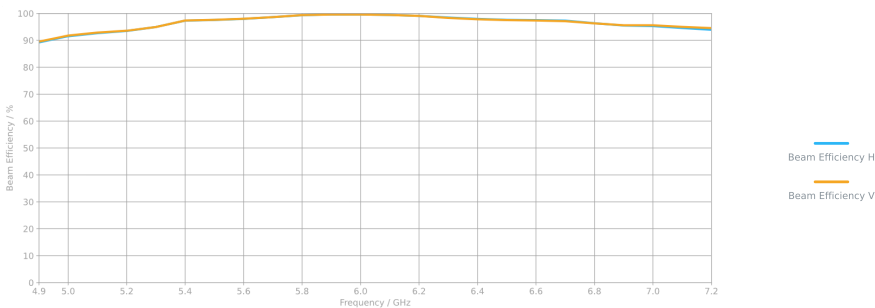

RADIATION PATTERNS

