

# UltraHorn™ TP

ULTIMATE NOISE REJECTING POINT-TO-POINT  
ANTENNA WITH TWISTPORT™ CONNECTOR

UH-TP-5-24



# UltraHorn™ TP

## Overview

---


|                               | Product ID | Dimensions            | Weight*          | Gain   | Compatible Wireless Platforms               |
|-------------------------------|------------|-----------------------|------------------|--------|---------------------------------------------|
| <b>UltraHorn™ TP<br/>5-24</b> | UH-TP-5-24 | 634 x 578 x<br>480 mm | 8.2 kg<br>18 lbs | 24 dBi | any TwistPort™ Adaptor<br>any SIMPER™ Radio |

---

\*Estimation based on pre-production units. Subject to change.

# UltraHorn™ TP

## Package Contents



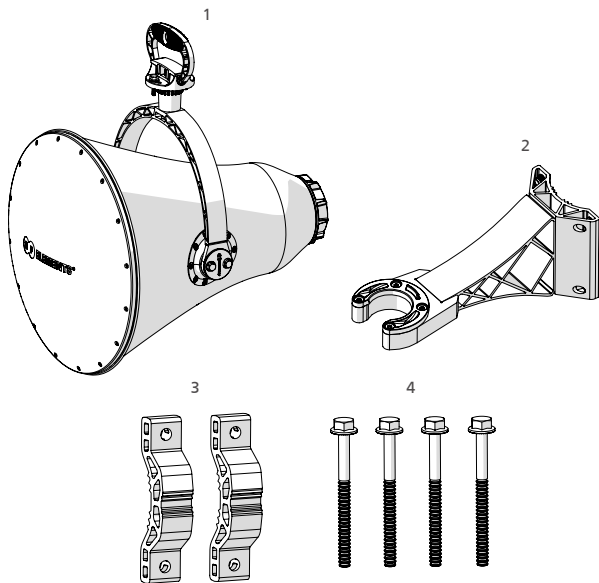


| Number | Description               | Quantity |
|--------|---------------------------|----------|
| 1      | UltraHorn™ TP Body        | 1x       |
| 2      | UltraHorn™ TP Bracket Arm | 1x       |
| 3      | UltraHorn™ TP Bracket     | 2x       |
| 4      | M8 x 90mm Screw           | 4x       |

# UltraHorn™ TP

## Installation Guide

Step 1

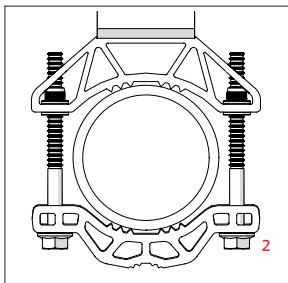
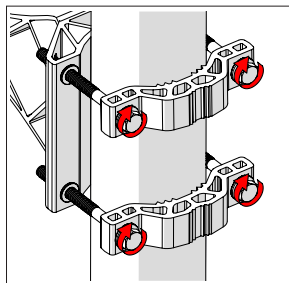
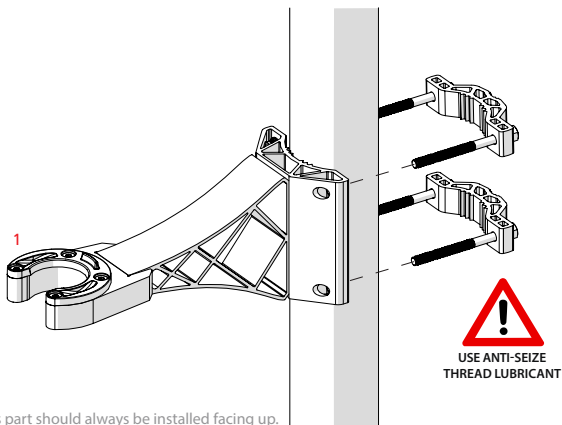


2 Tighten all screw equally.

# UltraHorn™ TP

## Installation Guide




Step 2

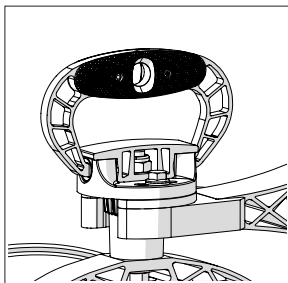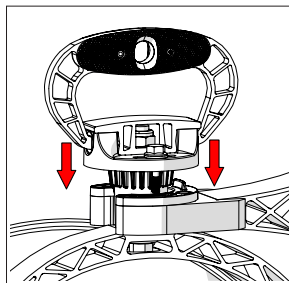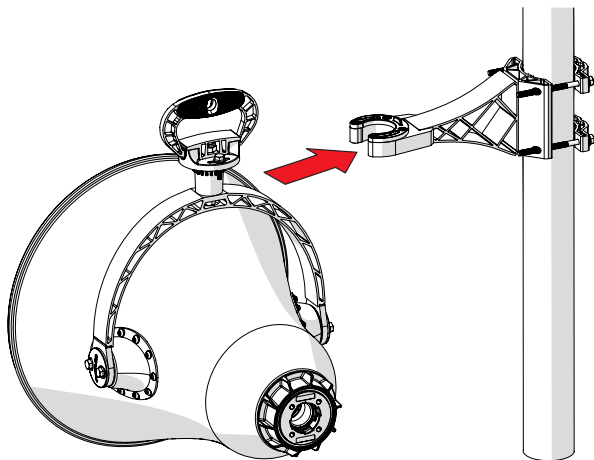

# UltraHorn™ TP

## Installation Guide



Step 3

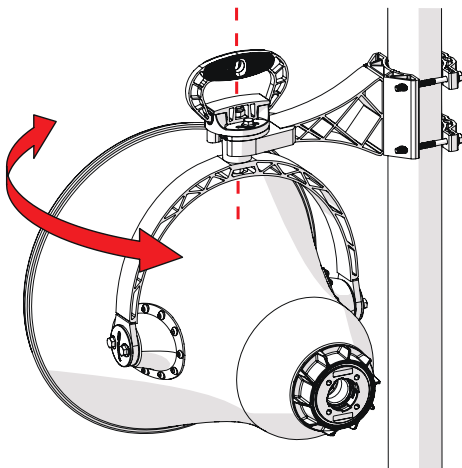


# UltraHorn™ TP

Step 4

## Installation Guide

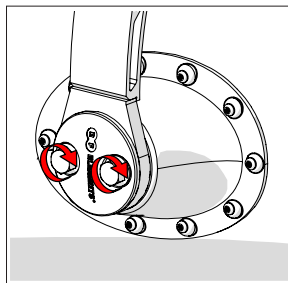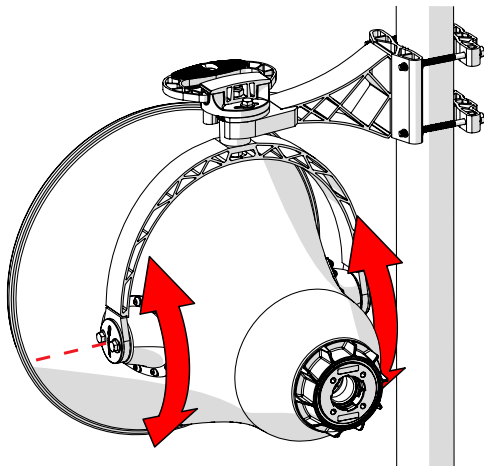

Left side


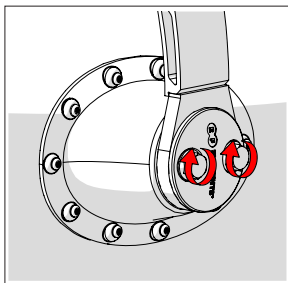


Right side

# UltraHorn™ TP

Step 5

## Installation Guide

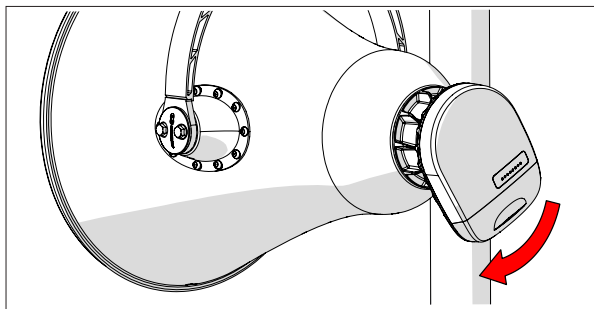
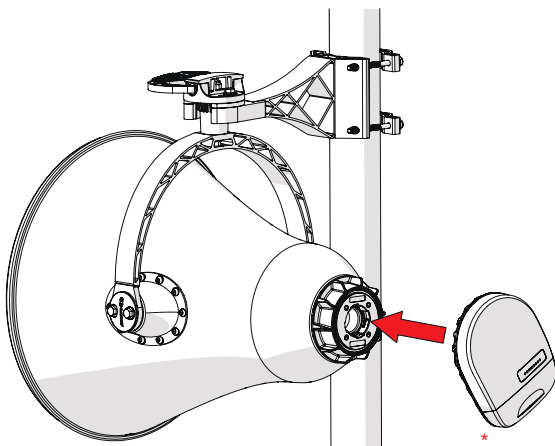


\* TwistPort™ Adaptor or SIMPER™ Radio sold separately.

# UltraHorn™ TP

Step 6

## Uninstallation Guide

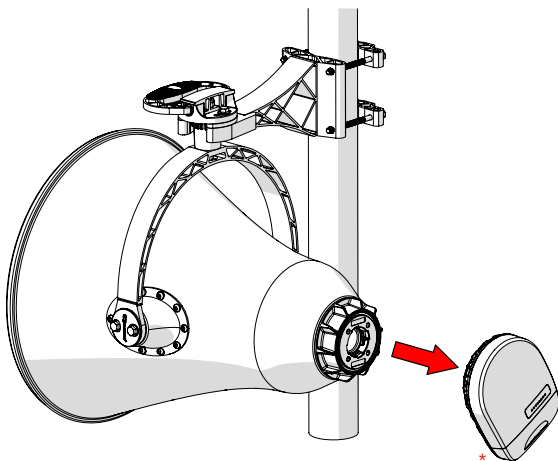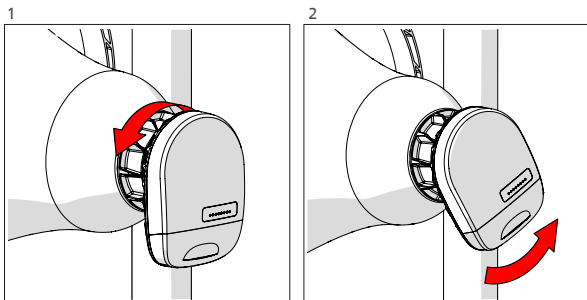

\* TwistPort™ Adaptor or SIMPER™ Radio sold separately.

## Compatible Devices:

### **RF elements®**

any TwistPort™ Adaptor  
any SIMPER™ Radio with TwistPort™ connector

RF elements®, TwistPort™, SIMPER™ and UltraHorn™  
are trademarks of RF elements s.r.o., Humenne, Slovakia.  
All rights of trademark owners reserved.



RF elements s.r.o.  
Phone: +421 2 3260 3711  
info@rfelements.com  
[www.rfelements.com](http://www.rfelements.com)

